


DIN 508 T-Slot Nut

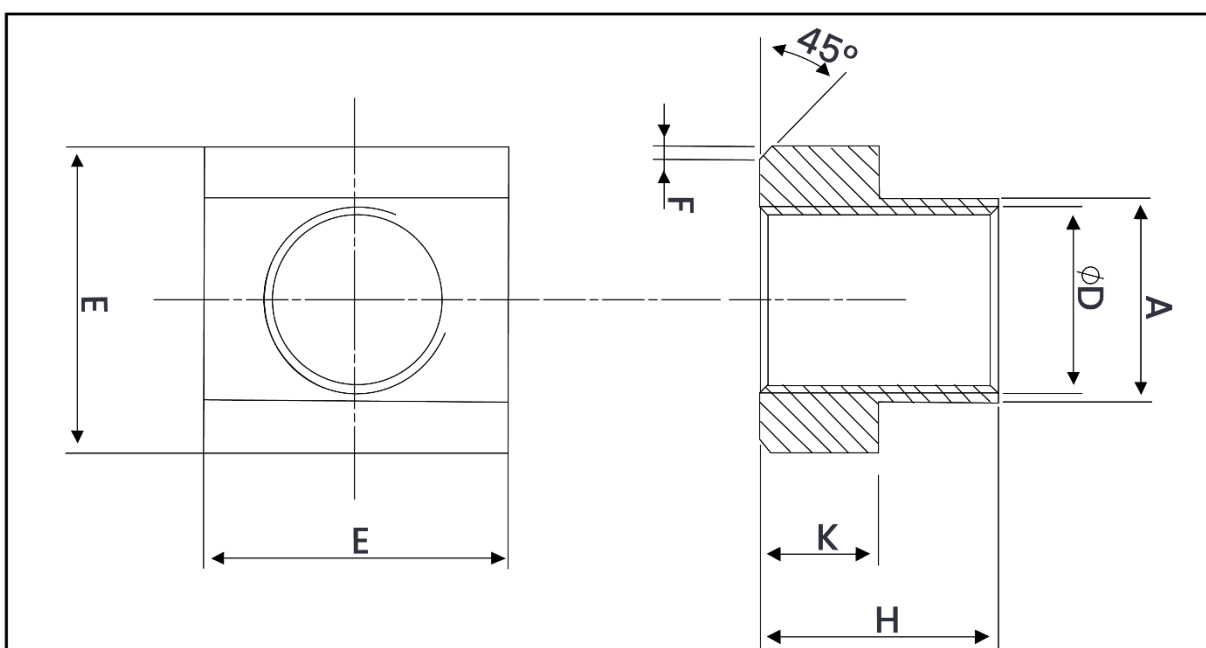

Metric Dimensions – DIN 508 T-Slot Nut

Thread D	A			E		K		F	H
	Nominal	Min.	Max.	Min.	Max.	Min.	Max.		
M4	5	4.50	4.70	8.50	9	2.70	3	1	6.50
M5	6	5.50	5.70	9.50	10	3.50	4	1.60	8
M6	8	7.50	7.70	12.50	13	5.50	6	1.60	10
M8	10	9.50	9.70	14.50	15	5.50	6	1.60	12
M10	12	11.40	11.70	17.50	18	6.50	7	2.50	14
M12	14	13.40	13.70	21.50	22	7.50	8	2.50	16
M16	18	17.40	17.70	27.50	28	9.50	10	2.50	20
M20	22	21.40	21.70	34.50	35	13.50	14	2.50	28
M24	28	27.40	27.70	43	44	17	18	4	36
M30	36	35.30	35.60	53	54	21	22	6	44
M36	42	41.30	41.60	54	65	25	26	6	52
M42	48	47.30	47.60	74	75	29	30	6	60
M48	54	53.20	53.60	84	85	33	34	6	70