


DIN 6926

Flange Nylock Nut

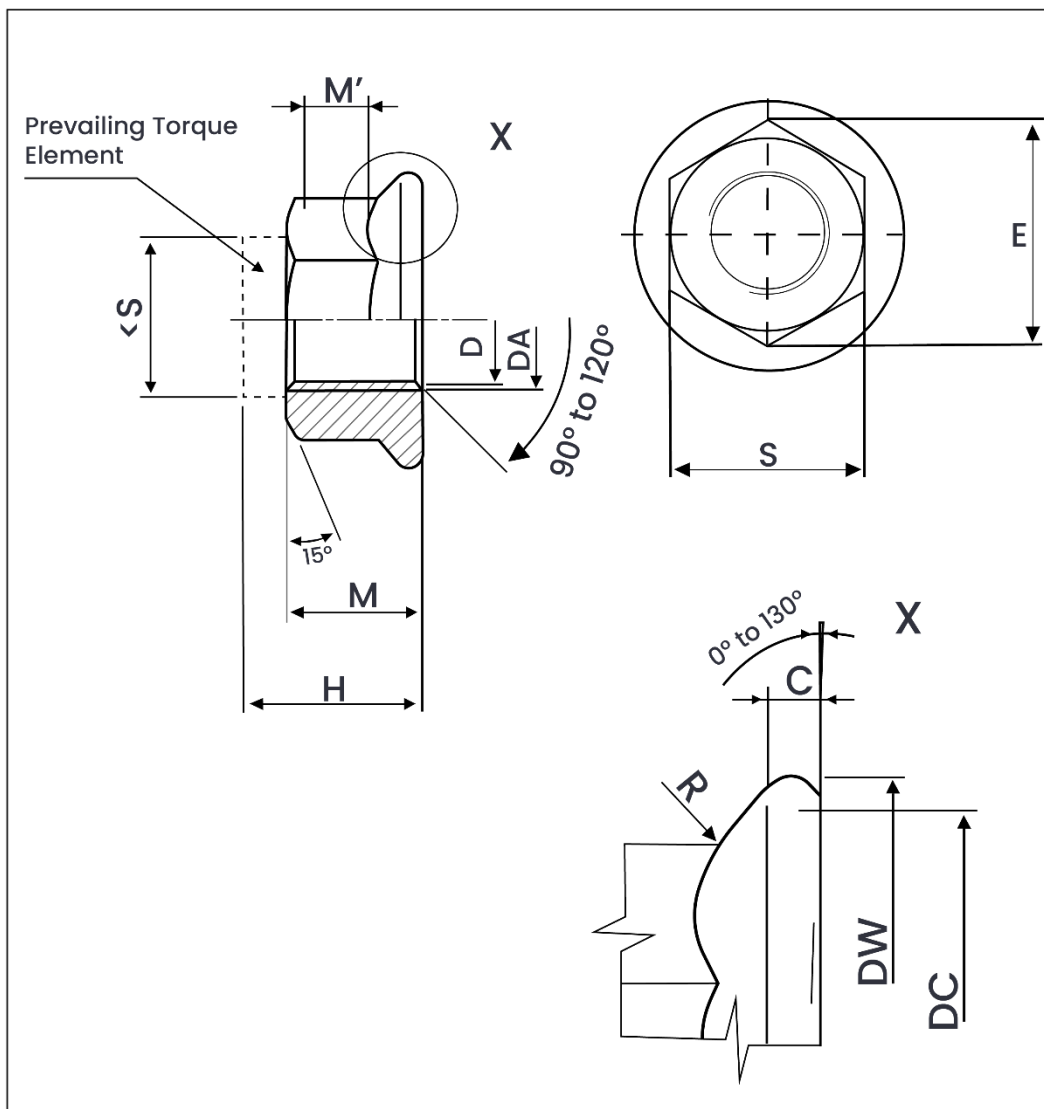

Metric Dimensions – DIN 6926 Flange Nylock Nut

Thread D		M5	M6	M8	M10	M12	M14	M16	M20
Pitch		0.80	1	1.25	1.50	1.75	2	2	2.50
DA	Min.	5	6	8	10	12	14	16	20
	Max.	5.75	6.75	8.75	10.80	13	15.10	17.30	21.60
H	Min.	6.74	8.74	10.67	13.07	15.67	17.68	19.46	23.96
	Max.	7.10	9.10	11.10	13.50	16.10	18.20	20.30	24.80
C	Min.	1	1.10	1.20	1.50	1.80	2.10	2.40	3
DC	Max.	11.80	14.20	17.90	21.80	26	29.90	34.50	42.80
E	Min.	8.79	11.05	14.38	16.64	20.03	23.36	26.75	32.95
DW	Min.	9.80	12.20	15.80	19.60	23.80	27.60	31.90	39.90
S	Min.	7.78	9.78	12.73	14.73	17.73	20.67	23.67	29.16
	Max.	8	10	13	15	18	21	24	30
M	Min.	4.70	5.70	7.60	9.60	11.60	13.30	15.30	18.90
M'	Min.	2.20	3.10	4.50	5.50	6.70	7.80	9	11.10
R	Max.	0.30	0.36	0.48	0.60	0.72	0.88	0.96	1.20