


DIN 84

Slotted Cheese Head Screw

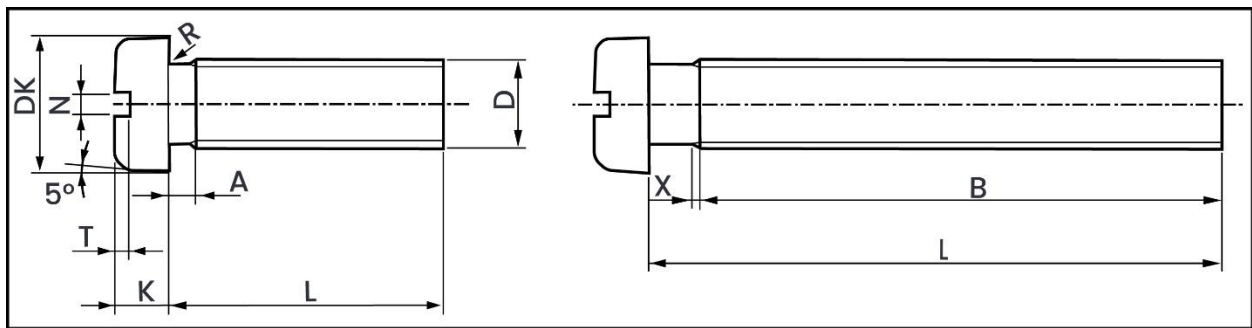

Metric Dimensions – DIN 84 Slotted Cheese Head Screw

Table 1: Metric Dimensions – M1 to M2.50

Thread D		M1	M1.20	M1.40	M1.60	M1.80	M2	M2.50
Pitch		0.25	0.25	0.30	0.35	0.35	0.40	0.45
A	Max.	0.50	0.50	0.60	0.70	0.70	0.80	0.90
B	Min.	25	25	25	25	25	25	25
DK	Min.	1.86	2.16	2.46	2.86	3.22	3.62	4.32
	Max.	2	2.30	2.60	3	3.40	3.80	4.50
K	Min.	0.56	0.66	0.76	0.86	1.06	1.16	1.46
	Max.	0.70	0.80	0.90	1	1.20	1.30	1.60
N	Nominal	0.25	0.30	0.30	0.40	0.40	0.50	0.60
	Min.	0.31	0.36	0.36	0.46	0.46	0.56	0.66
	Max.	0.45	0.50	0.50	0.60	0.60	0.70	0.80
R	Min.	0.10	0.10	0.10	0.10	0.10	0.10	0.10
T	Min.	0.25	0.30	0.40	0.45	0.50	0.60	0.70
W	Min.	0.16	0.21	0.21	0.26	0.36	0.36	0.56
X	Max.	0.60	0.60	0.75	0.90	0.90	1	1.10

Table 2: Metric Dimensions – M3 to M10

Thread D		M3	M3.50	M4	M5	M6	M8	M10
Pitch		0.50	0.60	0.70	0.80	1	1.25	1.50
A	Max.	1	1.20	1.40	1.60	2	2.50	3
B	Min.	25	38	38	38	38	38	38
DK	Min.	5.32	5.82	6.78	8.28	9.78	4.70	5.70
	Max.	5.50	6	7	8.50	10	13	16
K	Min.	1.86	2.26	2.46	3.12	3.60	4.70	5.70
	Max.	2	2.40	2.60	3.30	3.90	5	6
N	Nominal	0.80	1	1.20	1.20	1.60	2	2.50
	Min.	0.86	1.06	1.26	1.26	1.66	2.06	2.56
	Max.	1	1.20	1.51	1.51	1.91	2.31	2.81
R	Min.	0.10	0.10	0.20	0.20	0.25	0.40	0.40
T	Min.	0.85	1	1.10	1.30	1.60	2	2.40
W	Min.	0.76	0.96	1.06	1.52	1.60	2.20	2.70
X	Max.	1.25	1.50	1.75	2	2.50	3.20	3.80