


DIN 908

Hexagon Socket Screw Plugs with Sealing Face

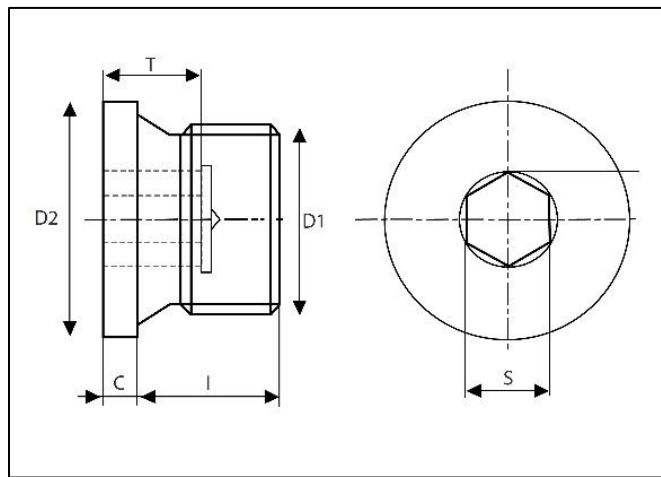

Metric Dimensions – DIN 908 Hexagon Socket Screw Plugs with Sealing Face

Table 1: Metric Dimensions – M10 to M30

D1	D2	S	E	C		I		Length Approx	T min
				Min.	Max.	Min.	Max.		
M10	14	5	5.70	3	3.50	7.80	8.20	11	5
M12	17	6	6.90	3	3.50	11.80	12.20	15	7
M14	19	6	6.90	3	3.50	11.80	12.20	15	7
M16	21	8	9.20	3	3.50	11.80	12.20	15	7.50
M18	23	8	9.20	4	4.50	11.80	12.20	16	7.50
M20	25	10	11.40	4	4.50	13.80	14.20	18	7.50
M22	27	10	11.40	4	4.50	13.80	14.20	18	7.50
M24	29	12	13.70	4	4.50	13.80	14.20	18	7.50
M26	31	12	13.70	4	4.50	15.80	16.20	20	9
M27	32	12	13.70	4	4.50	15.80	16.20	20	9
M30	36	17	19.40	4	4.50	15.80	16.20	20	9

Table 2: Metric Dimensions – M33 to M64

D1	D2	S	E	C		I		Length Approx	T min
				Min.	Max.	Min.	Max.		
M33	39	17	19.40	5	5.50	15.80	16.20	21	9
M36	42	19	21.70	5	5.50	15.80	16.20	21	10.50
M38	44	19	21.70	5	5.50	15.80	16.20	21	10.50
M39	46	19	21.70	5	5.50	15.80	16.20	21	10.50
M42	49	22	25.20	5	5.50	15.80	16.20	21	10.50
M45	52	22	25.20	5	5.50	15.80	16.20	21	10.50
M48	55	24	27.40	5	5.50	15.80	16.20	21	10.50
M52	60	24	27.40	5	5.50	15.80	16.20	21	10.50
M56	64	32	36.60	5	5.50	19.80	20.20	25	14
M60	68	32	36.60	5	5.50	19.80	20.20	25	14
M64	72	32	36.60	5	5.50	19.80	20.20	25	14