


DIN 964

Slotted Raised Countersunk Head Screw

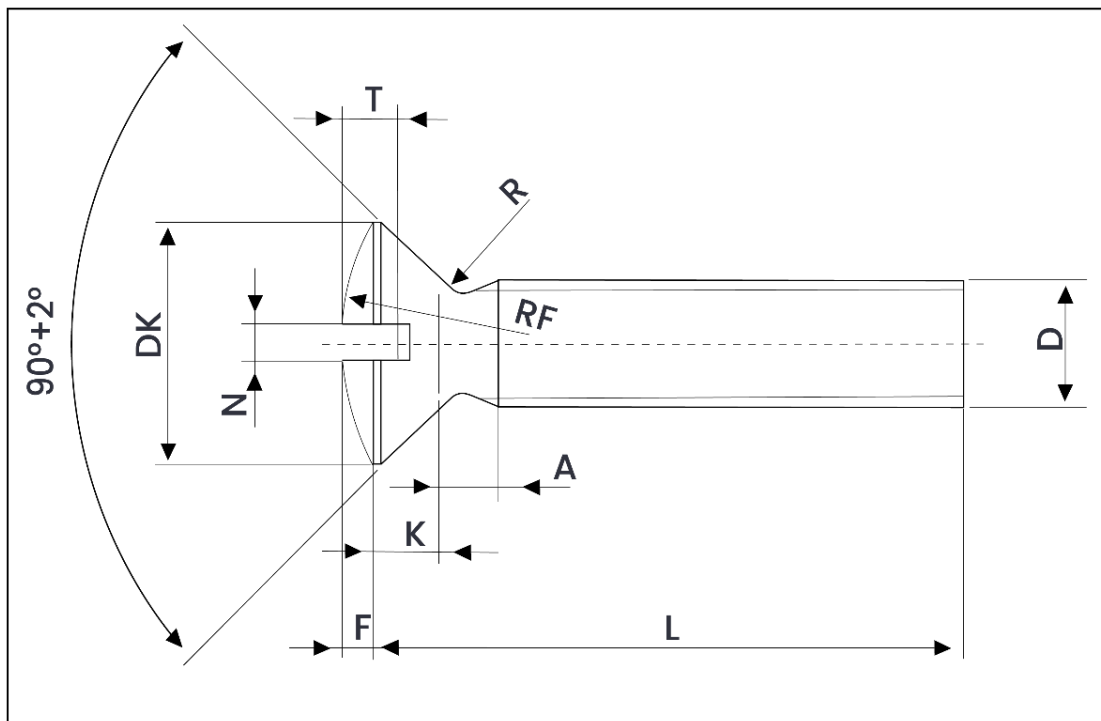

Weight Chart – DIN 964 Slotted Raised Countersunk Head Screw

Weight in Kg/1000 pieces

Table 1: Weight Chart – M1 to M3.50

L			M1	M1.20	M1.40	M1.60	M2	M2.50	M3	M3.50
Nominal	Min.	Max.								
2	1.80	2.20	0.016	0.027	0.039	0.055				
3	2.80	3.20	0.021	0.034	0.049	0.067	0.119	0.211		
4	3.75	4.25	0.025	0.041	0.057	0.078	0.138	0.242	0.35	0.536
5	4.75	5.25	0.029	0.047	0.066	0.09	0.156	0.272	0.395	0.596
6	5.75	6.25		0.054	0.076	0.102	0.175	0.302	0.439	0.656
8	7.70	8.30			0.093	0.125	0.212	0.362	0.527	0.775
10	9.70	10.30			0.111	0.145	0.249	0.422	0.615	0.894
12	11.65	12.35					0.287	0.482	0.703	1.01
14	13.65	14.35					0.325	0.543	0.791	1.13
16	15.65	16.35					0.362	0.603	0.879	1.25
18	17.65	18.35					0.397	0.663	0.968	1.37
20	19.60	20.40						0.723	1.06	1.49
22	21.60	22.40						0.783	1.14	1.61
25	24.60	25.40						0.874	1.28	1.79
28	27.60	28.40							1.41	1.97
30	29.60	30.40							1.50	2.09
35	34.50	35.50								2.39

Table 2: Weight Chart – M4 to M10

L			M4	M5	M6	M8	M10
Nominal	Min.	Max.					
5	4.75	5.25	0.824				
6	5.75	6.25	0.902	1.49			
8	7.70	8.30	1.06	1.73	2.66		
10	9.70	10.30	1.21	1.98	3.01	6.14	
12	11.65	12.35	1.37	2.23	3.36	6.78	11.70
14	13.65	14.35	1.52	2.47	3.72	7.41	12.70
16	15.65	16.35	1.68	2.72	4.07	8.05	13.70
18	17.65	18.35	1.83	2.97	4.42	8.68	14.70
20	19.60	20.40	1.99	3.22	4.78	9.32	15.70
22	21.60	22.40	2.14	3.46	5.13	9.95	16.70
25	24.60	25.40	2.37	3.83	5.66	10.90	18.20
28	27.60	28.40	2.61	4.11	6.19	11.80	19.70
30	29.60	30.40	2.76	4.44	6.55	12.50	20.70
35	34.50	35.50	3.15	4.93	7.43	14.10	23.70
40	39.50	40.50	3.53	5.68	8.31	15.70	25.70
45	44.50	45.50		6.43	9.20	17.30	28.20
50	49.50	50.50		7.18	10.10	18.90	30.70
55	54	56				20.50	33.20
60	59	61					35.80