


DIN 966

Cross Recessed Raised Countersunk Machine Screw

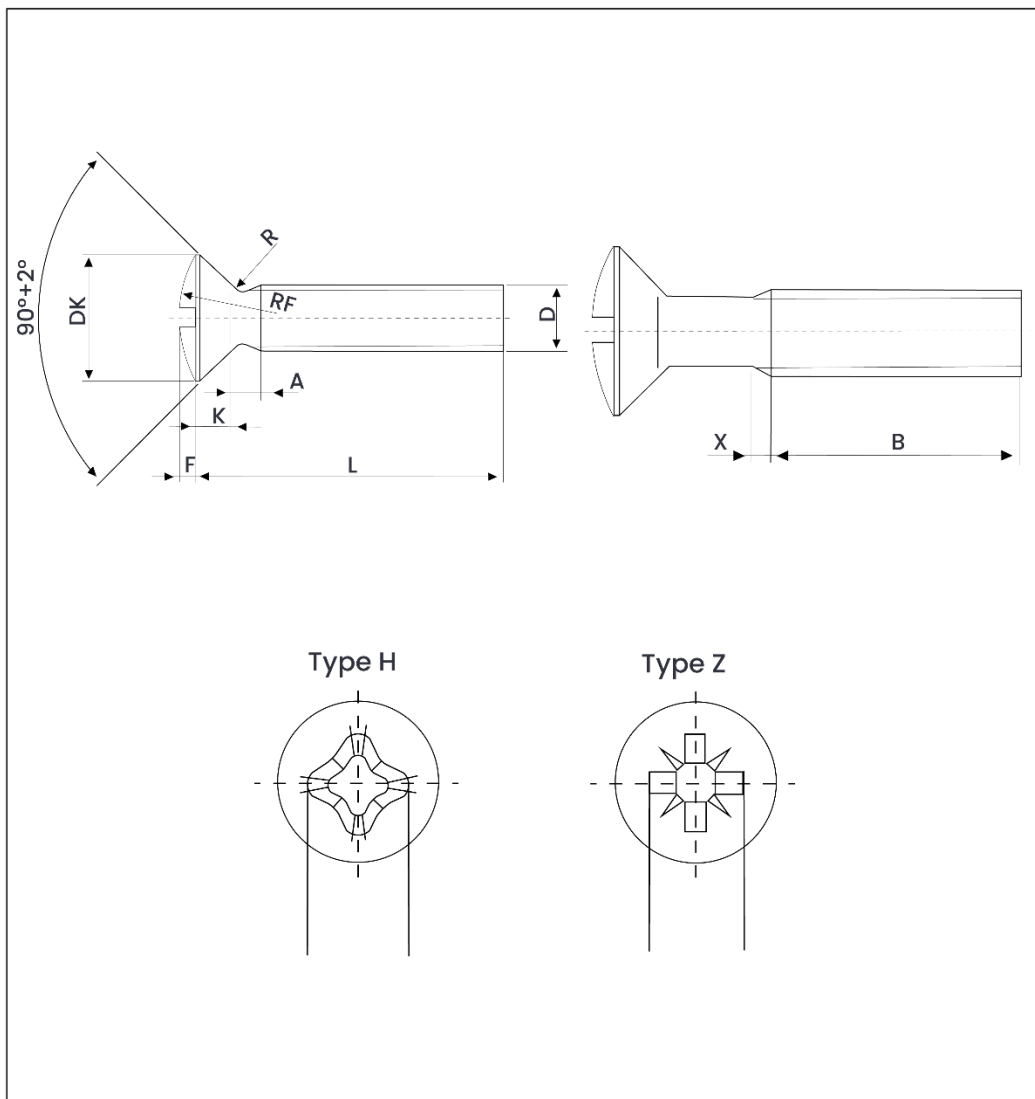

Weight Chart – DIN 966 Cross Recessed Raised Countersunk Machine Screw

Weight in Kg/1000 pieces

Table 1: Weight Chart – M1.60 to M3.50

L			M1.60	M2	M2.50	M3	M3.50
Nominal	Min.	Max.					
3	2.80	3.20	0.067	0.119	0.211		
4	3.75	4.25	0.078	0.138	0.242	0.35	0.536
5	4.75	5.25	0.09	0.156	0.272	0.395	0.596
6	5.75	6.25	0.102	0.175	0.302	0.439	0.656
8	7.70	8.30	0.125	0.212	0.362	0.527	0.775
10	9.70	10.30	0.145	0.249	0.422	0.615	0.894
12	11.65	12.35	0.165	0.287	0.482	0.703	1.01
14	13.65	14.35	0.184	0.325	0.543	0.791	1.13
16	15.65	16.35	0.204	0.362	0.603	0.879	1.25
18	17.65	18.35		0.397	0.663	0.968	1.37
20	19.60	20.40		0.439	0.723	1.06	1.49
22	21.60	22.40			0.783	1.14	1.61
25	24.60	25.40			0.874	1.28	1.79
28	27.60	28.40				1.41	1.97
30	29.60	30.40				1.50	2.09
35	34.50	35.50					2.39

Table 2: Weight Chart – M4 to M10

L			M4	M5	M6	M8	M10
Nominal	Min.	Max.					
5	4.75	5.25	0.824				
6	5.75	6.25	0.902	1.49			
8	7.70	8.30	1.06	1.73	2.66		
10	9.70	10.30	1.21	1.98	3.01	6.14	
12	11.65	12.35	1.37	2.23	3.36	6.78	11.70
14	13.65	14.35	1.52	2.47	3.72	7.41	12.70
16	15.65	16.35	1.68	2.72	4.07	8.05	13.70
18	17.65	18.35	1.83	2.97	4.42	8.68	14.70
20	19.60	20.40	1.99	3.22	4.78	9.32	15.70
22	21.60	22.40	2.14	3.46	5.13	9.95	16.70
25	24.60	25.40	2.37	3.83	5.66	10.90	18.20
28	27.60	28.40	2.61	4.11	6.19	11.80	19.70
30	29.60	30.40	2.76	4.44	6.55	12.50	20.70
35	34.50	35.50	3.15	4.93	7.43	14.10	23.70
40	39.50	40.50	3.53	5.68	8.31	15.70	25.70
45	44.50	45.50		6.43	9.20	17.30	28.20
50	49.50	50.50		7.18	10.10	18.90	30.70
55	54	56				20.50	33.20
60	59	61					35.80