


DIN 94

Split Pin (Cotter Pin)

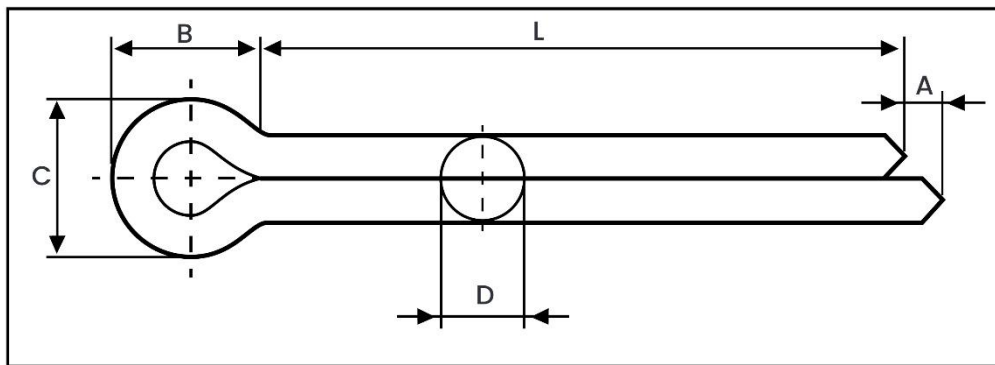

Metric Dimensions – DIN 94 Split Pin (Cotter Pin)

Table 1: Metric Dimensions – M0.60 to M3.20

Nominal Diameter		0.60	0.80	1	1.20	1.60	2	2.50	3.20
D	<i>Min.</i>	0.40	0.60	0.80	0.90	1.30	1.70	2.10	2.70
	<i>Max.</i>	0.50	0.70	0.90	1	1.40	1.80	2.30	2.90
C	<i>Min.</i>	0.90	1.20	1.60	1.70	2.40	3.20	4	5.10
	<i>Max.</i>	1	1.40	1.80	2	2.80	3.60	4.60	5.80
A	<i>Min.</i>	0.80	0.80	0.80	1.25	1.25	1.25	1.25	1.60
	<i>Max.</i>	1.60	1.60	1.60	2.50	2.50	2.50	2.50	3.20
B		2	2.40	3	3	3.20	4	5	6.40

Table 2: Metric Dimensions – M4 to M20

Nominal Diameter		4	5	6.30	8	10	13	16	20
D	<i>Min.</i>	3.50	4.40	5.70	7.30	9.30	12.10	15.10	19
	<i>Max.</i>	3.70	4.60	5.90	7.50	9.50	12.40	15.40	19.30
C	<i>Min.</i>	6.50	8	10.30	13.10	16.60	21.70	27	33.80
	<i>Max.</i>	7.40	9.20	11.80	15	19	24.80	30.80	38.60
A	<i>Min.</i>	2	2	2	2	3.20	3.20	3.20	3.20
	<i>Max.</i>	4	4	4	4	6.30	6.30	6.30	6.30
B		8	10	12.60	16	20	26	32	40