


DIN 985
Low Hex Lock Nut with Nylock Insert

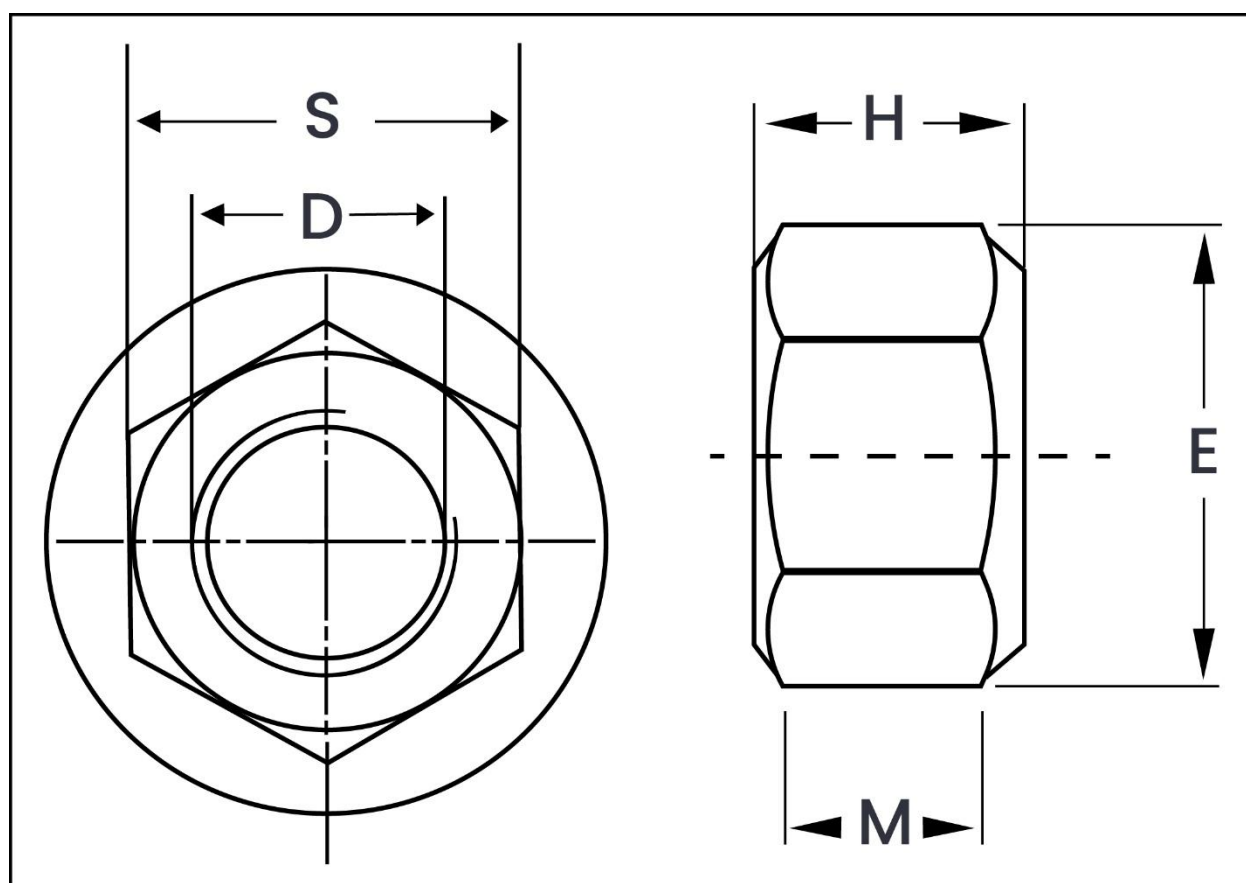

Metric Dimensions – DIN 985 Low Hex Lock Nut with Nylock Insert

Table 1: Metric Dimensions – M3 to M10

D		M3	M4	M5	M6	M7	M8	M10
P		0.50	0.70	0.80	1	1	1.25	1.50
H	<i>Min.</i>	3.70	4.70	4.70	5.70	7.14	7.64	9.64
	<i>Max.</i>	4	5	5	6	7.50	8	10
E	<i>Min.</i>	6.01	7.66	8.79	11.05	12.12	14.38	18.90
M	<i>Min.</i>	1.65	2.20	2.75	3.30	3.85	4.40	5.50
S	<i>Min.</i>	5.32	6.78	7.78	9.78	10.73	12.73	16.73
	<i>Max.</i>	5.50	7	8	10	11	13	17

Table 2: Metric Dimensions – M12 to M24

D		M12	M14	M16	M18	M20	M22	M24
P		1.75	2	2	2.50	2.50	2.50	3
H	<i>Min.</i>	11.57	13.30	15.30	17.66	18.70	20.70	22.70
	<i>Max.</i>	12	14	16	18.50	20	22	24
E	<i>Min.</i>	21.10	24.49	26.75	29.56	32.95	35.03	39.55
M	<i>Min.</i>	6.60	7.70	8.80	9.90	11	12.20	13.20
S	<i>Min.</i>	18.67	21.67	23.67	26.16	29.16	31	35
	<i>Max.</i>	19	22	24	27	30	32	36